

PUSH-FIT AIR BRAKE PIPE FITTINGS

(ISO 9001 T.U.V. spec.)
FOR NYLON TUBING

For further information about these products,
please contact our technical department:
Erentek Ltd., Malt Kiln Lane, Waddington, Lincoln LN5 9RT
Telephone: 01522 720065 Fax: 01522 729155
Email: sales@erentek.co.uk Web: www.erentek.co.uk


1. STUD COUPLINGS

Thread Size	Pipe o.d. (mm)
	6 8 10 12 16
1/8"
1/4"
M12
M14
M16
M22




2. SWIVEL ELBOWS

Use with swivel fitting (item 3 or 9C)
Can be re-aligned after installation




3. SWIVEL FITTINGS

Fits items 2, 4, and 5.
Allows re-alignment of fitting after installation.

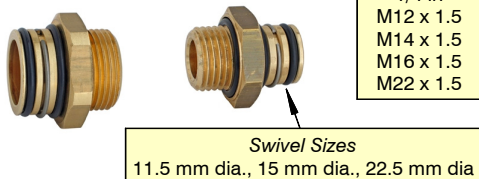


4. SWIVEL TEE CONNECTORS

Use with swivel fitting (item 3 or 9C)
Can be re-aligned after installation

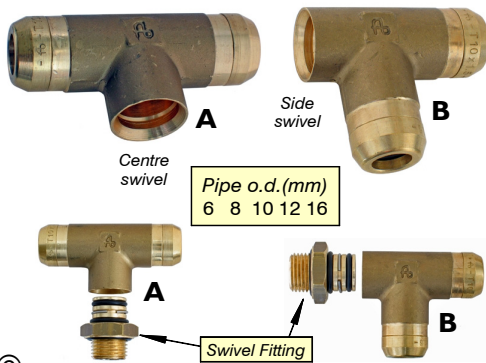


5. SWIVEL TEES (THREADED)

Use with swivel fitting (item 3 or 9C)
Can be re-aligned after installation

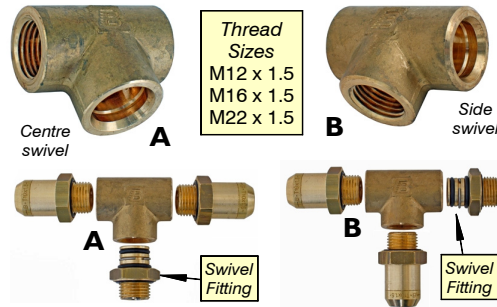


6. THREADED TEES

With three equal female threads

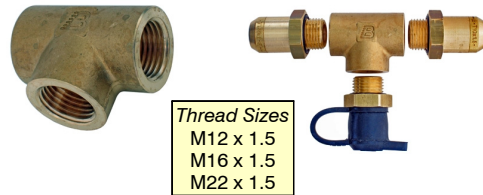


7. FIXED ELBOWS AND TEES

Supplied with locknut and "O" ring seal.
Can be aligned before tightening.


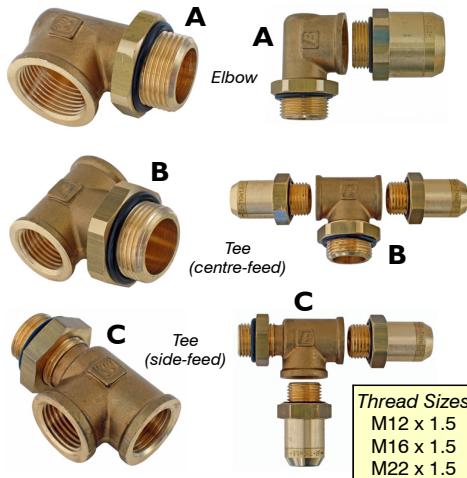


8. EQUAL TEE AND STRAIGHT CONNECTORS

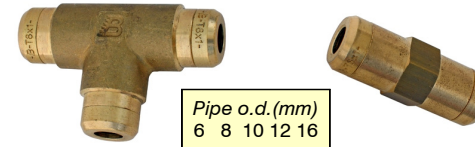

9. BULKHEAD FITTINGS

Complete with locknut

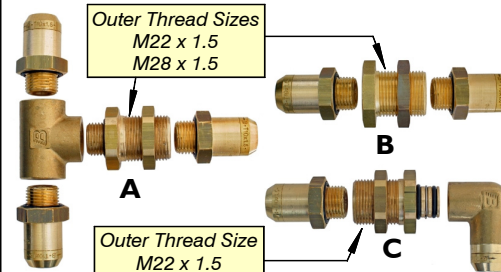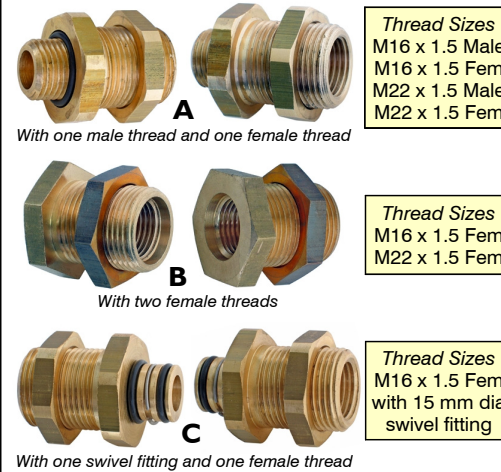


10. VALVE CONNECTORS

Two Male Threads. With locknut and "O" ring seals.
Valves can be aligned before tightening



11. BLANKING PLUGS

Various types available

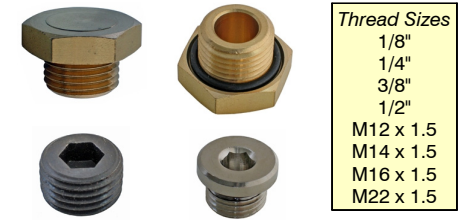

12. REDUCER BUSHES

Various sizes available



13. TEST POINTS AND GAUGES

